


## 39 165 00D UNISSET ELEMENT FOR WC

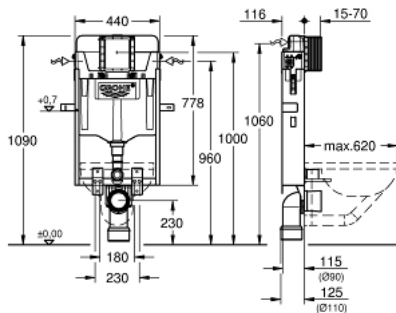

### PRODUCT DESCRIPTION (1/2)

- with flushing cistern GD 2, 3 - 4.5 l
- 778 x 440 x 116 mm
- for single installation
- 2 WC fixing bolts
- distance of fixing bolts 180/230 mm
- outlet bend Ø 90 mm
- reducer Ø 90/110 mm
- inlet and outlet connecting set
- flushing cistern GD 2, 3 - 4.5 l, containing following features
- adjustment ex factory 4.5 l and 3 l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- water supply from left/right/back or top
- low noise (group I acc. to German Noise Specification)
- cistern insulated against condensation
- ½" angle valve with push fit flexible hose union
- no tools required for installation of inspection shaft
- for vertical or horizontal use
- preparation for shower toilets with additional accessory 40 899 000

Pure Freude  
an Wasser



## 39 165 00D **UNISET ELEMENT FOR WC**

### **PRODUCT DESCRIPTION** (2/2)

- for mounting of small flush plates revision shaft 40 911 000 needs to be ordered separately